



LFK**LED Signal Light****LED****IP55****Ø100**

New LED flashing beacon! So bright, it has a dimming input.

Dimensions

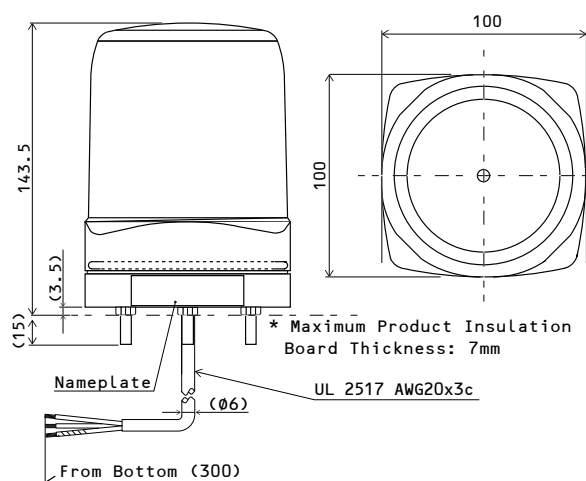

Wiring

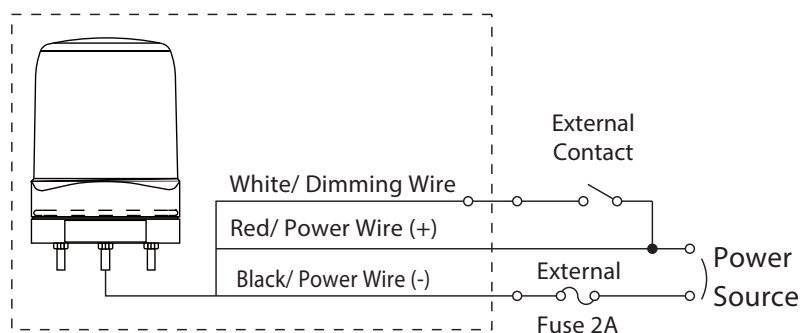

Specifications

Model	LFK-12S	LFK-24S	LFK-48S
Rated Voltage	DC 12V	DC 24V	DC 48V
Current Consumption (max)	0.49A	0.19A	0.17A
Operating Ambient Temperature Range	-20°C to +60°C		
Protection Rating	IP55		
Mounting Location	Indoor or Outdoor Use		
Flash Rate	140 ±14fpm (Triple-flash)		
Certifications	CE ¹ , RoHS, ECE		
Mass	0.5kg		

*1 LFK-48 not CE certified.

How to Order

LFK-□S-□

Rated Voltage

12: DC 12V
24: DC 24V
48: DC 48V

Color

R: Red
Y: Amber
G: Green
B: Blue
C: Clear/White