

3/4" – 1-1/2" Industrial Impacttools




2925P1

- ▶ 3/4" square drive
- ▶ Textured epoxy finish
- ▶ Corrode-X protects components from corrosion
- ▶ Twin-hammer mechanism
- ▶ 3-position power regulation
- ▶ 360° swivel air inlet



3940B2Ti

- ▶ 1" square drive
- ▶ High-efficiency, 7-vane, reverse-bias motor
- ▶ Pressure-fed lubrication system
- ▶ Twin-hammer mechanism
- ▶ Integral muffler
- ▶ Bronze endplates

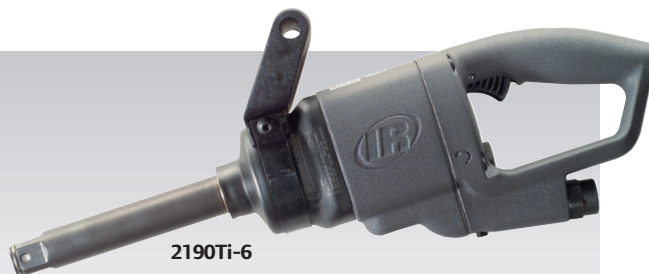

2190Ti-6

- ▶ Revolutionary tire-change handle designed specifically for high-volume fleet service
- ▶ Now features improved anvil, bushing, and exhaust designs
- ▶ 6" extended anvil
- ▶ Ergonomically designed handle and grip

Model*	Description	Handle	Free Speed rpm	Max Torque ft-lb (Nm)	Recommended Torque Range ft-lb (Nm)	Weight lb (kg)	Length in (mm)	cfm	Recommended Hose Size in (mm)
3/4" SUPER-DUTY									
2925P1	3/4" square	Pistol	5,200	1,450 (1966)	350 – 1,100 (476 – 1,496)	12.5 (5.7)	8.88" (225)	60	1/2" (13)
2925RBP1	3/4" square reverse bias	Pistol	5,200	F: 1,300 (1,763) R: 1,600 (2,169)	400 – 1,400 (542 – 1,898)	12.5 (5.7)	8.88" (225)	60	1/2" (13)
3/4" HEAVY-DUTY									
1720P1	3/4" square	Pistol	5,500	1,000 (1,360)	200 – 600 (271 – 814)	11.88 (5.39)	7.63" (194)	40	1/2" (13)
3/4" MAINTENANCE-DUTY									
2141P	3/4" square reverse bias	Pistol	7,250	F: 1,000 (1,356) R: 1,200 (1,627)	200 – 900 (271 – 1,220)	7 (3.2)	8.2" (208)	40	1/2" (13)
1" SUPER-DUTY									
2925P3	1" square	Pistol	5,200	1,450 (1,966)	350 – 1,100 (475 – 1,492)	11.88 (5.39)	8.88" (225)	60	1/2" (13)
2925RBP3	1" square reverse bias	Pistol	5,200	F: 1,300 (1,763) R: 1,600 (2,169)	400 – 1,400 (407 – 1,763)	11.88 (5.39)	8.88" (225)	60	1/2" (13)
3940B2Ti	1" square reverse bias	Grip I.T.	6,000	F: 2,500 (3,390) R: 2,750 (3,730)	500 – 1,650 (680 – 2,240)	21.2 (9.6)	13.5" (343)	75	3/4" (19)
3940P2Ti	1" square reverse bias	Pistol	5,300	F: 2,500 (3,390) R: 2,750 (3,730)	500 – 1,650 (680 – 2,440)	20.4 (9.3)	10.1" (256)	75	3/4" (19)
3942B2Ti	1" square reverse bias	Grip I.T.	5,000	F: 2,750 (3,390) R: 3,250 (4,406)	1,000 – 1,950 (1,356 – 2,644)	22.6 (10.5)	14.3" (362)	95	3/4" (19)
1" HEAVY-DUTY									
1712B2	1" square	Grip I.T.	6,000	1,400 (1,898)	450 – 1,00 (612 – 1,860)	18.25 (8.28)	11.25" (286)	47	3/4" (19)
1712P2	1" square	Pistol	6,000	1,350 (1,830)	450 – 1,000 (612 – 1,860)	18.25 (8.28)	11.25" (286)	56	3/4" (19)
1" MAINTENANCE-DUTY									
2190Ti-6	1" square 6" extended anvil	Grip I.T.	6,800	1,650 (2,237)	150 – 1,200 (204 – 1,627)	15.5 (7.03)	21.48" (546)	58	1/2" (13)
285B-6	1" square 6" extended anvil	Grip I.T.	5,000	1,475 (2,000)	100 – 900 (136 – 1,220)	27.8 (12.61)	20.1" (511)	45	1/2" (13)
280-S-6	#5 splined 6" extended anvil	Grip I.T.	6,000	1,600 (2,169)	150 – 1,000 (204 – 1,360)	23.8 (10.80)	18.5" (470)	55	1/2" (13)
1-1/2" SUPER-DUTY									
3955B2Ti	1-1/2" square reverse bias	Grip I.T.	2,750	F: 4,700 (6,372) R: 5,000 (6,779)	1,600 – 3,900 (2,169 – 5,288)	34.6 (15.7)	16.5" (419.1)	80	3/4" (19)

*P denotes a pin-type socket retainer in drive sizes 3/8" – 1/2" and a through-hole socket retainer in drive sizes 3/4" and above.

IT = Inside trigger OT = Outside trigger