


Linear Arms

BA Series




BA Series: Smooth, perpendicular tightening operations up to 100 Nm (74 lbf.ft).

- Eliminate torque reaction
- Ensure perpendicularity
- Avoid repetitive injuries
- Prevent fatigue
- Improve tightening quality
- Reduce absenteeism
- Improve productivity

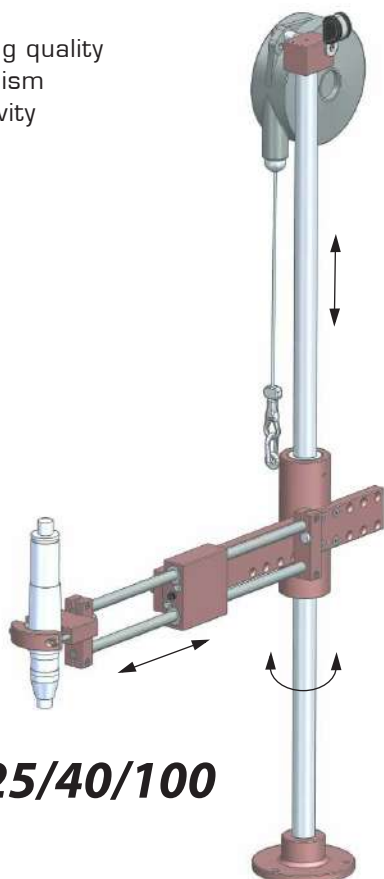

BA 5/12/25/40/100

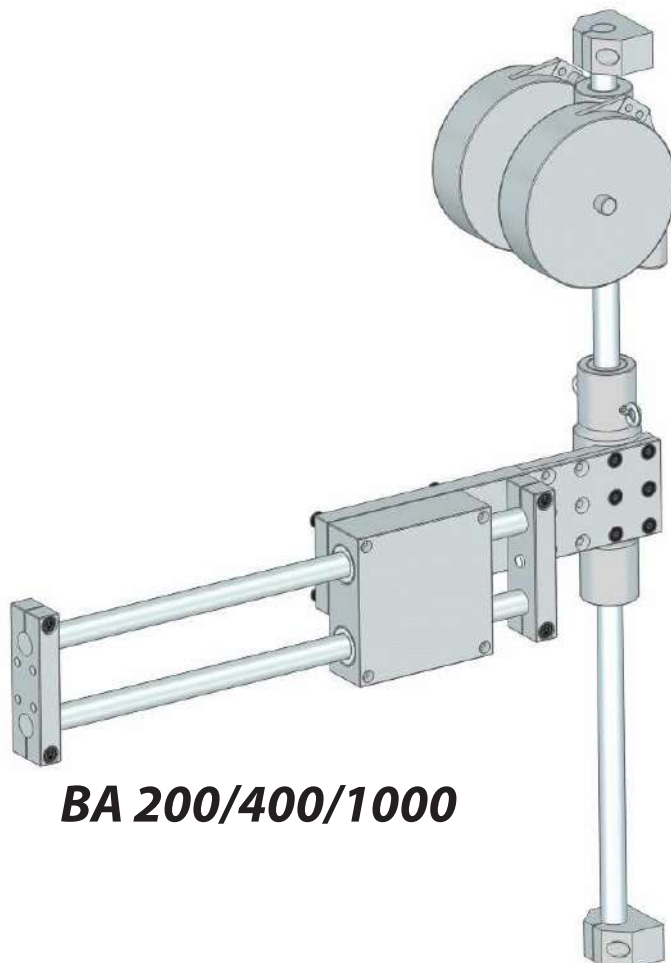


BA 200/400/1000

Model	Torque max		Tool Ø		Stroke		Load max		Code
	Nm	(lbf.ft)	mm	(in)	mm	(in)	kg	(lbs)	
BA 5	5	(3.7)	25 - 42	(1.0 - 1.7)	200	(7.9)	0.9	(2)	4-5200085
BA 12	12	(8.8)	27 - 50	(1.1 - 2.0)	225	(8.9)	1.2	(2.6)	4-5201000
BA 25	25	(18.4)	28 - 52	(1.1 - 2.1)	250	(9.8)	2.2	(4.8)	4-5200076
BA 40	40	(29.5)	28 - 52	(1.1 - 2.1)	295	(11.6)	2.2/4*	(4.8/8.8*)	4-5200067
BA 100	100	(73.7)	28 - 52	(1.1 - 2.1)	325	(12.8)	3/5*	(6.60/11.02*)	4-5200068

*Higher capacity with additional balancer. **Code : 4-5200143.** See page 6.


Model	Torque max		Stroke		Load max		Code
	Nm	(lbf.ft)	mm	(in)	kg	(lbs)	
BA 200	200	(148)	345	(14)	8	(17.6)	4-5201092
BA 400	400	(295)	400	(16)	12	(26.5)	4-5201093
BA 1000	1000	(738)	-	-	-	-	on request

BA 200/400/1000 are delivered without clamps or floor posts, and are non-anodized.



Linear arms

BA 5 to 100 Dimensions

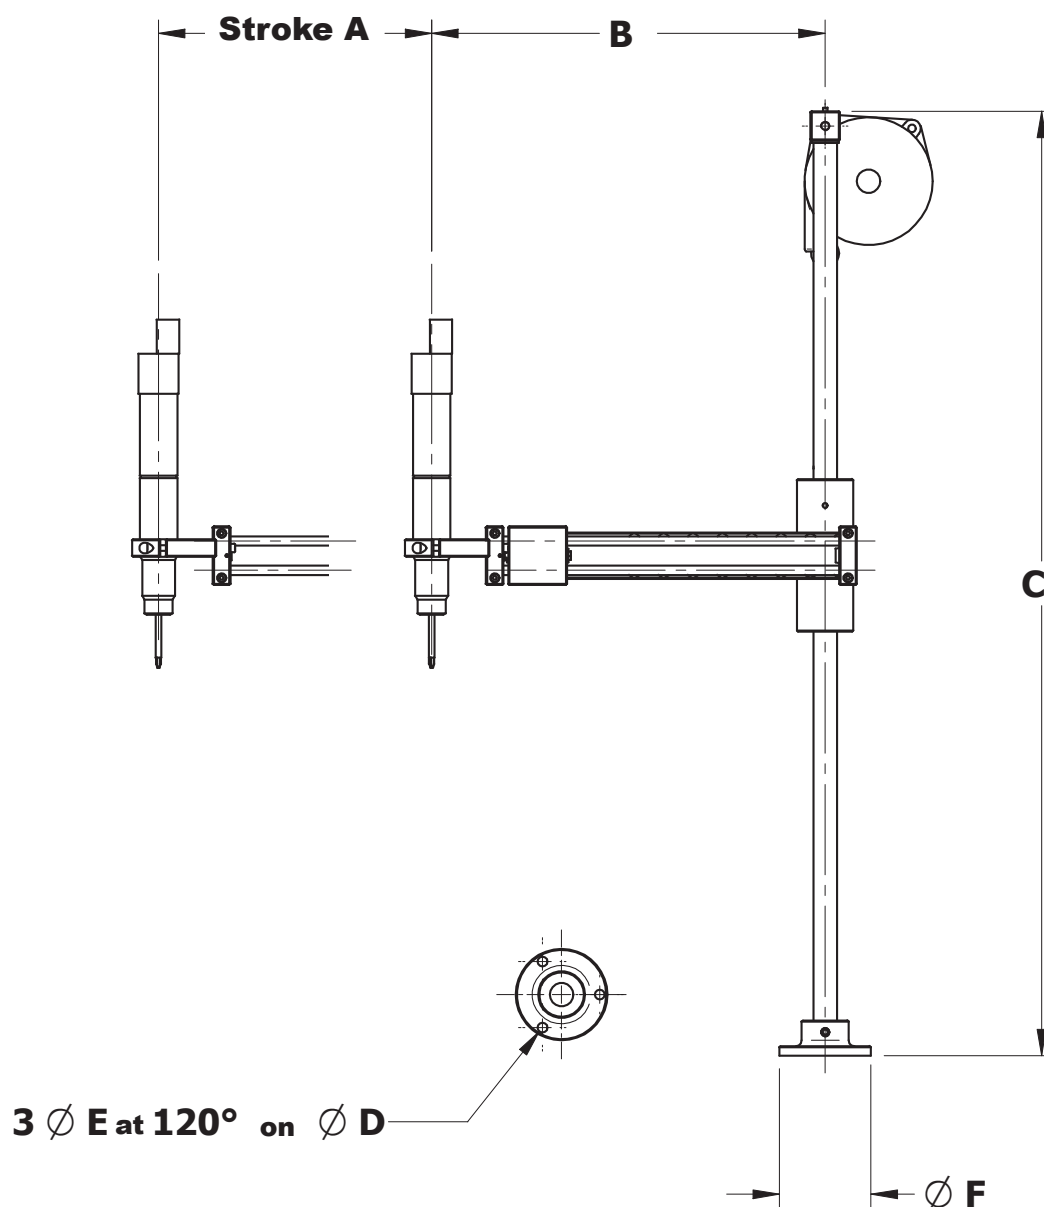

BA Dimensions

Model	Stroke A		B min		B max		C		D		E		F	
	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)
BA 5	200	(7.9)	235	(9.25)	315	(12.40)	705	(27.8)	65	(2.56)	8.5	(0.33)	78	(3.1)
BA 12	200	(7.9)	186	(7.3)	336	(13.2)	805	(31.7)	65	(2.56)	8.5	(0.33)	78	(3.1)
BA 25	250	(9.8)	221	(8.7)	396	(15.6)	908	(35.8)	65	(2.56)	8.5	(0.33)	78	(3.1)
BA 40	295	(11.6)	260	(10.2)	460	(18.1)	1008	(39.7)	100	(3.94)	8.5	(0.33)	118	(4.7)
BA 100	330	(12.99)	315	(12.4)	515	(20.3)	1008	(39.7)	126	(4.96)	10.5	(0.41)	148	(5.8)