# **GLOBAL SERVICE**

Norbar is the only torque equipment manufacturer capable of offering tool and instrument recalibration services to the original factory standard on four continents.

Accredited laboratories in Australia, USA, Singapore, China and India operate the same equipment and procedures as the UKAS accredited laboratory within our headquarters in the UK.



NORBAR TORQUE TOOLS LTD Wildmere Road, Banbury, Oxfordshire, OX16 3JU

UNITED KINGDOM Tel + 44 (0)1295 753600 Email sales@norbar.com



NORBAR TORQUE TOOLS 45-47 Raglan Avenue, Edwardstown SA 5039 AUSTRALIA Tel + 61 (0)8 8292 9777 Email enquiry@norbar.com.au



NORBAR TORQUE TOOLS INC 36400 Biltmore Place, Willoughby Ohio 44094

Tel + 1 866 667 2272 Email inquiry@norbar.us

NORBAR TORQUE TOOLS PTE LTD 194 Pandan Loop, #07-20 Pantech Business Hub SINGAPORE 128383 Tel + 65 6841 1371 Email enquires@norbar.sg

NORBAR TORQUE TOOLS (SHANGHAI) LTD 91 Building- 7F, No. 1122, North Qinzhou Road, Xuhui District, Shanghai CHINA 201103 Tel + 86 21 6145 0368 Email sales@norbar.com.cn



### www.norbar.com



## NORBAR PRODUCT PORTFOLIO

**Torque Screwdrivers** 



Torque Wrenches



-10

Electronic Torque Wrenches



Manual Torque Multipliers

**Pneumatic Torque Tools** 



**Electronic Torque Tools** 



Î

000

**Torque Measurement Instruments** 

**Torque Transducers** 

Ultrasonic Bolt Measurement

**Calibration Services** 



For more information please scan here

Distributed by



# **NORTRONIC®**

WITH WIRELESS DATA INTERFACE FOR THIRD PARTY SOFTWARE INTEGRATION



© Norbar Torque Tools Ltd 2018



# ACCURATE ELECTRONIC TORQUE AND ANGLE CONTROL

# NORTRONIC<sup>®</sup> - THE ELECTRONIC TORQUE WRENCH FROM NORBAR PRECISE, WIRELESS CONNECTABLE AND TRACEABLE

NorTronic<sup>®</sup> sets the benchmark for electronic torque wrenches with its combination of accuracy, wireless capability and angle measurement. The wrench offers great flexibility in connection possibilities as it can be

capability and angle measurement. The wrench offers great flexibility in connection possibilities as it can be interfaced with customers' existing production control software and NorTronic's own unique Torque Data System (TDS) software.



#### VERSATILITY Supplied with a robust

push through ratchet

Compatible with Norbar's huge range of spanner end fittings

Easy to depress plunger for ratchet removal

Ability to enter offset compensation for non-standard end fittings. Torque wrench reads correctly for non-standard end fittings. No need to do additional calculations

Ability to set a Torque, Angle and Final Torque Target Ability to have up to 15 linked or non-linked Targets on the tool at any one time

#### DATA ANALYSIS

Unique TDS (Torque Data System) software included. Enables complete data management and archiving to a PC through seamless data exchange

**Two-way data management capability.** Torque and Angle data can be sent to TDS in real time (or uploaded from memory)

- Multiple targets can be sequenced and linked
- Tool settings can be configured at PC
- Data can be transferred by two means: i) USB cable (supplied)
- USB Wireless Adaptor for your PC (sold separately, see image to left) Part No. 43508: 868MHz UK, Europe, Singapore and India Part No. 43509: 915MHz USA, Canada, Australia and New Zealand

Up to 2400 reading memory store, time and date stamped. Enables numerous tightening cycles before needing to upload data to TDS

Ability to interface to ProSuite process control software

Calibration date of tool can be displayed via TDS or third party software

ASCII mode allows for interfacing the tool with third party software

Ability to produce and save Torque & Angle graphs (in real time) from a USB connected tool

#### ACCURACY

**±1% accuracy** between 20 and 100% of wrench operating capacity


±2% accuracy between 10 and 19% of wrench operating capacity Clockwise (CW) and Counter-Clockwise (CCW) torque and angle calibration

Supplied with unique Torque and Angle Calibration Certificate

Angle calibration in accordance with VDI/VDE 2648

ISO 6789-2:2017 UKAS accredited Torque calibration in both clockwise and counter-clockwise direction



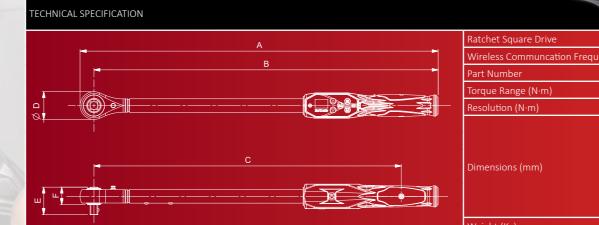

#### EASY TO USE

Two full colour OLED displays positioned at 90° to each other so that the display can be seen whether operating in the vertical or horizontal plane

Only 5 user buttons for ease of use

Visual (digits change colour), audible and vibration indications when target is reached

Low battery warning

Ability to turn off angle display if not required

12 Torque units - can be used in any country's preferred torque units When used with a HandTorque<sup>®</sup> gearbox the NorTronic<sup>®</sup> can directly display, save and send the calculated output torque of the HandTorque<sup>®</sup>



NorTronic<sup>®</sup> DLL (Dynaminc Link Library) Plugin enables NorTronic<sup>®</sup> tools to be interfaced to a customer's existing production line control software.

#### PERFORMANCE

- IP44 protection against dust and water ingress. Protected against dust and sprayed water from all directions
- One piece aluminium handle, rugged and durable
- Portable, powered by three AA batteries. (Rechargeable batteries supplied)
- Robust extruded aluminium case

		Model							
		50			200		330		
		3⁄8"		1⁄2"		1/2"		1⁄2"	
ncy (MHz)		868	915	868	915	868	915	868	915
		43500	43504	43501	43505	43502	43506	43503	43507
		5-50		5-50		20-200		30-330	
		0.01		0.01		0.1		0.1	
	А	468		472		592		808	
	В	449		449		569		782	
	С	388		388		508		721	
	ØD	38		46		46		52	
	E	34		45		45		45	
	F	21		29		29		28	
		1.20		1.20		1.45		1.86	