


HIGH TEST CHAIN GRADE 43

WORKING LOAD LIMIT: 2,600 TO 20,200 LBS.

Grade 43 chain, commonly called High Test, is manufactured to meet ASTM and NACM specifications. Typical uses include container securement, logging, towing, and marine industry. Grade 43 chain is available in many finishes and package configurations. It should not be used for overhead lifting.

BENEFITS & FEATURES

- Meets ASTM & NACM standards
- Available in a wide assortment of finishes including: self-colored and galvanized
- 50% stronger than Grade 30 chain
- Permanent identification on chain
- 100% proof tested
- Available in drums and multiple styles of assemblies
- Design factor 3:1

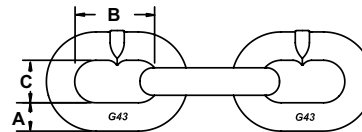

Chain Size (in.)	Working Load Limit (lbs.)	Nominal Chain Dimensions (in.)			Weight (lbs./ft.)	Approximate Number of Links (per ft.)	Self Colored Finish				Hot Dipped Galvanized Finish			
		Material Diameter A	Inside Length B	Inside Width C			Full Drum		Half Drum		Full Drum		Half Drum	
							Product Code	Length (ft.)	Product Code	Length (ft.)	Product Code	Length (ft.)	Product Code	Length (ft.)
Import														
1/4	2,600	0.28	1.22	0.51	0.65	9.87	678141	800	678131	400	678341	800	—	—
5/16	3,900	0.34	1.25	0.54	1.04	9.60	678142	550	678132	275	678342	550	—	—
3/8	5,400	0.39	1.35	0.58	1.40	8.89	678143	400	678133	200	678343	400	678333	200
North American														
1/2	9,200	0.52	1.73	0.81	2.42	6.93	678145	200	—	—	678345	200	—	—
5/8	13,000	0.63	1.92	0.86	3.63	6.26	678146	150	678136	75	678346	150	—	—
3/4	20,200	0.78	2.40	1.07	5.68	5.06	678147	100	678137	50	678347	100	—	—

FINISHES: Self Colored, Galvanized