



EZ•CONNECT™

MASTER LINK & CHAIN SHORTENER

**DUAL RATED: GRADE 80 & GRADE 100
UP TO 39,100 LB. WORKING LOAD LIMIT**

The CM® EZ-Connect™ Master Link & Chain Shortener allows you to build chain slings easier than ever. We've combined two core components of every single or double chain sling, so it's easier to assemble and adjust your sling – and even easier to order.

BENEFITS & FEATURES

EASY ORDERING WITH ONE PART NUMBER

Eliminates the need to order two products. Use a single part number to get everything you need for your sling assembly.

THE ECONOMICAL CHOICE

See big savings when you purchase the CM® EZ-Connect™ versus individual components.

DUAL-RATED TO REDUCE INVENTORY

Fits Grade 80 and Grade 100 chain.

EASY TO ADJUST

Chain shortener allows you to adjust sling legs quickly and easily, utilizing the same sling for various reaches.

DEPENDABLE & SAFE OPERATION

Chain shortener features cradle hook to ensure full load seating. Does not require the sling to be de-rated.

FLEXIBILITY FOR SAFETY

Avoid dangerous side loading with the ability to use 30° to 60° angles.



USER-FRIENDLY I-BEAM PROFILE

I-beam design is easy to use and provides the same strength with smaller profile and weight when compared to other chain shorteners.

DURABLE FOR LONG SERVICE LIFE

Components are made from alloy steel, proof tested and powder coated for extra protection against corrosion.

MEETS ASME, ASTM & OSHA REQUIREMENTS

Buy with confidence knowing your product is safe to operate and meets required overhead lifting standards.




EZ•ORDER
EZ•INSTALL
EZ•ADJUST




EZ-CONNECT™

MASTER LINK & CHAIN SHORTENER

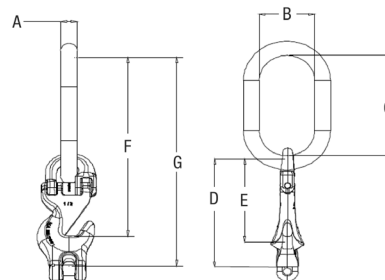

EZ-CONNECT FOR SINGLE LEG SLING

Product Code	Chain Size (in.)	Working Load Limit at 90° (lbs.)	Weight (lbs.)	Nominal Dimensions (in.)						
				Master Link			Shortener		Overall Reach	
				Material Diameter A	Width B	Pitch C	Pitch D	Pitch E	F	G
555232S1	9/32	4,300	1.9	0.562	2.5	5	4.76	3.38	8.38	9.76
555235S1	3/8	8,800	4.6	0.75	2.75	5.5	6.25	4.74	10.24	11.75
555238S1	1/2	15,000	9.6	1	3.5	7	7.57	5.82	12.82	14.57
555239S1	5/8	22,600	12.79	1	3.5	7	9.32	7.04	14.04	16.32

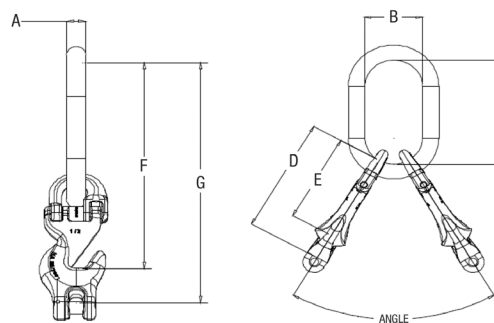

EZ-CONNECT FOR DOUBLE LEG SLING

Product Code	Chain Size (in.)	Working Load Limit (lbs.)			Weight (lbs.)	Nominal Dimensions (in.)						
		60°	45°	30°		Master Link			Shortener		Overall Reach	
						Material Diameter A	Width B	Pitch C	Pitch D	Pitch E	F	G
555232S2	9/32	7,400	6,100	4,300	3	0.562	2.5	5	4.76	3.38	8.38	9.76
555235S2	3/8	15,200	12,400	8,800	7.1	0.75	2.75	5.5	6.25	4.74	10.24	11.75
555238S2	1/2	26,000	21,200	15,000	14.5	1	3.5	7	7.57	5.82	12.82	14.57
555240S2	5/8	39,100	32,000	22,600	26.59	1.25	4.38	8.75	9.32	7.04	15.79	18.07